


Designed for the **INSULIT** range



Lfoam 18

Self-adhesive perimeter strip

ACOUSTIC AND THERMAL SEAL

Applications

- insulit Bi+7
- insulit Bi+9
- insulit Bi+20
- insulTop 15

Characteristics

Thickness : ± 5 mm
Length : 50 m
Width : 18,5 cm (6 + 12,5)
Color : Black
Adhesive on one side (with protective screen)
Pre-shaped fold


Material : reticulated PE foam

Lfoam 18 is a perimeter strip specially designed to be used with the acoustic and thermal underlays from the insulit range. Placed beneath a floating concrete screed, it avoids any lateral contact among the screed and the building structure.

L-foam 18 is placed in square, at the junction between the horizontally unrolled underlay and the wall.



Placement description

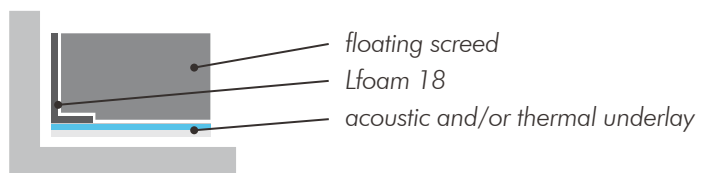

Once the underlay is laid on the floor, flush cut it at the base of the wall. Remove the protective film from the adhesive perimeter strip. Fasten the short side (6 cm) horizontally on the underlay and make the longest part (12 cm) climb along the wall. After the concrete screed is poured and the flooring finished, cut the excess of L-foam 18 with a cutter blade.